

"CX" SERIES

Maintained Type, Self-contained, Emergency Fluorescent Light Exit Sign Box / Plate

"CX"系列，長明式電池光管出路箱 / 吊牌

Standards

- BS 5266 – Part I
- BS 5499 – Part III
- BS EN 60598-2-22 (850°C hot wire test)
- FSD PPA 104(A) 4th Revision
- FSD Code of Practice Clause 5.10 Exit Sign


Specification

Surface mounted, self-contained, maintained type, single face exit sign box with automatic changeover device for 2 or 3 hours emergency battery discharge.




"CRYSTALITE" Cat. CX-10-NP2

1x10W, Emergency fluorescent light exit sign plate, white surrounding white letter

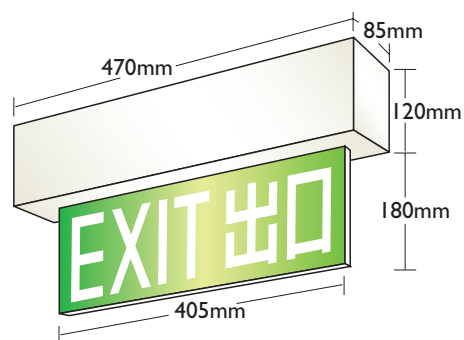

"CRYSTALITE" Cat. CX-20-NP2

1x18W Emergency fluorescent light exit sign plate, directional sign, right arrow

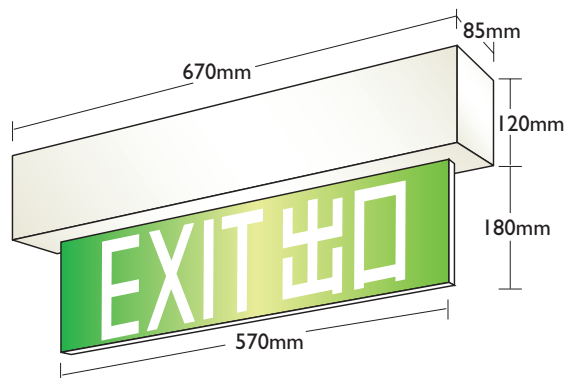

Technical Data

Model	CX-10-NP2	CX-20-NP2	CX-T5-14-NP2	CX-10-NP3	CX-20-NP3	CX-T5-14-NP3
System Mode	Maintained Type					
Normal Output	10W	18/20W	T5 14W	10W	18/20W	T5 14W
Emergency Output	250 lumens	350 lumens	330 lumens	250 lumens	350 lumens	330 lumens
Discharge Duration	2 Hours			3 Hours		
Battery	Sealed Ni-cd /Ni-mh High Temperature Rechargeable Battery					
	6V 1.5Ah	6V 2.2Ah	6V 1.5Ah	6V 2.2Ah	7.2 2.2Ah	6V 2.2Ah
Operating Temperature	0°C - 50°C					
Recharge Period	12 Hours For 2 Hours discharge / 24 Hours For 3 Hours discharge					
Line Voltage	A/C 220V~240V 50Hz +6%-10%					
Compliance	BS EN 60598-2-22 ; BS 5266-1, FSD PPA 104A (4 th Revision)					



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice