

"PL 4-PINS" SERIES


Conversion Kit Series for Compact Fluorescent Lamp
四針筷子光管及蝴蝶光管電池組件

Description

Most shopping malls, restaurants and commercial offices would also adopt 4-Pins compact fluorescent lamps. The common types are PL 7-42W. These lamps can be used at emergency when "PL 4-Pins Kits" are used. The Kits contain the battery packs that can light on the lamp for 2 to 3 hours duration.

Application

System Mode:	Maintained or Non-maintained Type
Battery:	Rechargeable high temperature Ni-cd or Ni-mh cells
Recharge Period:	12 Hours for 2 Hours discharge, 24 Hours for 3 Hours discharge
Test Switch:	Provided
LED Indicator:	Charging and mains on
Input Voltage:	A/C 220V~240V +6%, -10% 50Hz
Low Voltage Discharge Protection:	Electronic Protection for approximate 1V per cell
Operating Temperature:	0°C - 50°C

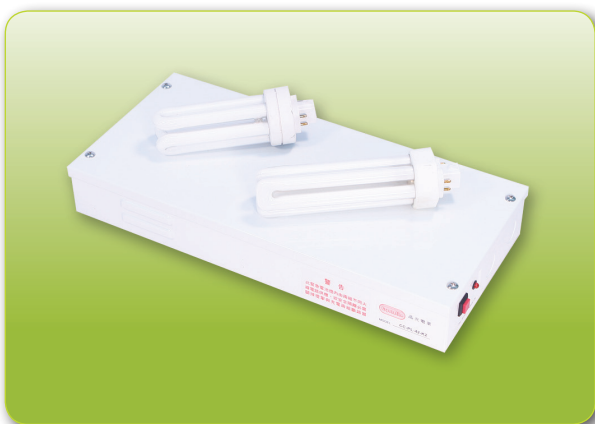


"CRYSTALITE" Cat. CC-PL-32-K2

4-Pins compact fluorescent conversion kit, 2 hours discharge




"CRYSTALITE" Cat. CC-PL-18-K3

4-Pins compact fluorescent conversion kit, 3 hours discharge

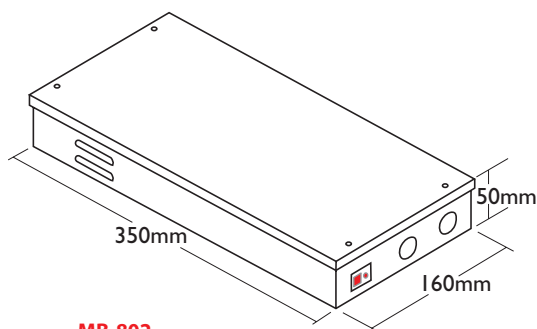

MB-802

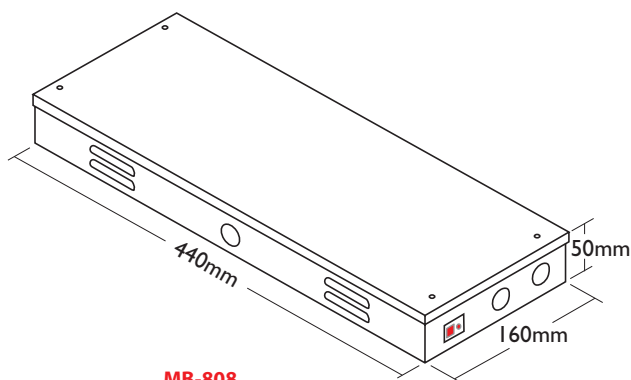

MB-808




SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice

"PL 4-PINS" SERIES


Conversion Kit Series for Compact Fluorescent Lamp
四針筷子光管及蝴蝶光管電池組件

Connection Diagram

Maintained Type
長明式

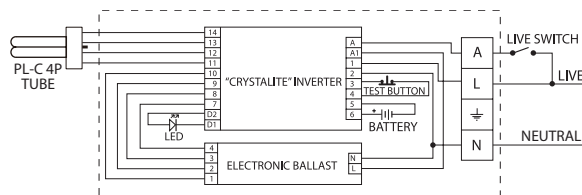

Non-maintained Type
後備式

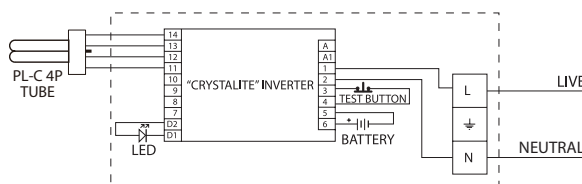

Two Hours Discharge Duration 兩小時放電

Model	CC-PL-13-K2	CC-PL-18-K2	CC-PL-26-K2	CC-PL-32-K2	CC-PL-42-K2
Suitable Tubes (4-Pins)	PL 7-13W	PL 18W	PL 26W	PL 32W	PL 42W
Emergency Output	30%				
Discharge Duration	2 Hours				
Battery	Sealed Ni-cd /Ni-mh High Temperature Rechargeable Battery				
	7.2V 2.2Ah	7.2V 2.2Ah	9.6V 2.2Ah	12V 2.2Ah	13.2V 2.2Ah
Line Voltage	A/C 220V~240V +6%, -10% 50Hz				
Low Voltage Discharge Protection	Electronic Protection for approximate 1V per cell				
Operating Temperature	0°C - 50°C				
Transfer Time	< 0.3 Second				
Recharge Period	12 Hours				
Compliance	BS EN 60598-2-22, BS EN 61347-2-7, BS 5266-1, FSD PPA 104A(4 th Revision)				
Metal Case	350 x 160 x 50 mm (L x W x H)				

Three Hours Discharge Duration 三小時放電

Model	CC-PL-13-K3	CC-PL-18-K3	CC-PL-26-K3	CC-PL-32-K3	CC-PL-42-K3
Suitable Tubes (4-Pins)	PL 7-13W	PL 18W	PL 26W	PL 32W	PL 42W
Emergency Output	30%				
Discharge Duration	3 Hours				
Battery	Sealed Ni-cd /Ni-mh High Temperature Rechargeable Battery				
	9.6V 2.2Ah	9.6V 2.2Ah	12V 2.2Ah	12V 4.0Ah	14.4V 4.0Ah
Line Voltage	A/C 220V~240V +6%, -10% 50Hz				
Low Voltage Discharge Protection	Electronic Protection for approximate 1V per cell				
Operating Temperature	0°C - 50°C				
Transfer Time	< 0.3 Second				
Recharge Period	12 Hours For 2 Hours discharge / 24 Hours For 3 Hours discharge				
Compliance	BS EN 60598-2-22, BS EN 61347-2-7, BS 5266-1, FSD PPA 104A(4 th Revision)				
Metal Case	440 x 160 x 50 mm (L x W x H)				



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice