

"AUXI LAMP" SERIES

12V 50W Auxiliary Lamp Conversion Kit

Description


Discharge lamps such as Metal-halide, SON and mercury-vapor are widely used in Public Area. As discharge lamp is not possible to operate by battery kit, 12V 50W Auxiliary lamp is generally used for emergency operation and light on when the discharge lamp is warming up.

Standards

- BS 5266 – Part I
- BS EN 60598-2-22 (850°C hot wire test)
- FSD PPA 104(A) 4th Revision


Connection Diagram

Maintained Type 長明式

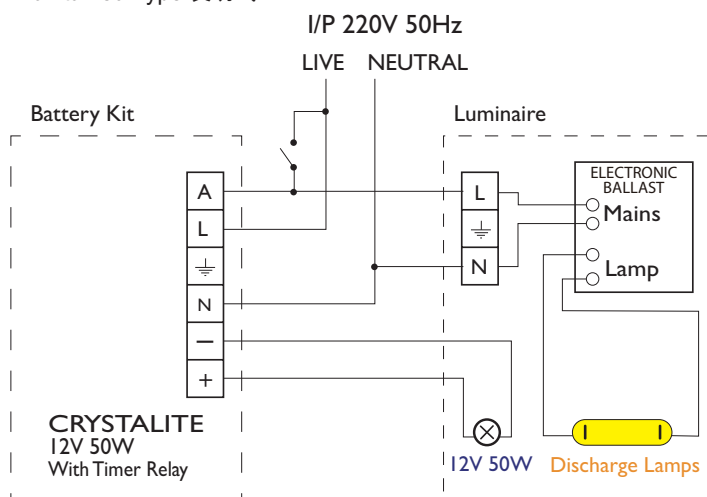

"CRYSTALITE" Cat. CC-12-50-K2+T

12V 50W Emergency Tungsten Halogen Lamp Power Pack, with timer relay and metal housing for 2 hours duration

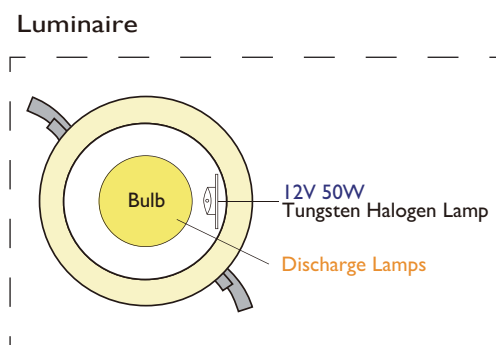

Technical Data

Model	CC-12-50-K2+T	CC-12-50-K3+T (50%)
System Mode	Maintained Type	
Normal Output	12V 50W Tungsten Halogen Lamp	
Emergency Output	90%	50%
Discharge Duration	2 Hours	3 Hours
Battery	Maintenance free sealed type Lead-Acid 12V 12Ah	
Operating Temperature	0°C - 50°C	
Transfer time	< 0.3 second	
Recharge Period	12 Hours	
Line Voltage	A/C 220V~240V +6%, -10% 50Hz	
Low Discharge Protection	Electronic Protection	
Compliance	BS EN 60598-2-22, BS 5266-1, FSD PPA 104A (4 th Revision)	
Metal Case	MB-803 340L x 200W x 70H (mm)	