

"PANDORA" LED SERIES

Perfectly match with lots of LED Lamps and Tubes


Description

Pandora LED Series can be used with some LED Lamps and tubes for economic purpose by limit the maximum voltage and current flow through it. The Kits contain battery packs that can light up the lamp for 2 or 3 hours duration.


Standards

- BS EN 60598-2-22
- BS EN 61347-2-7
- BS 5266-1
- FSD PPA 104(A) 4th Revision

Connection Diagram

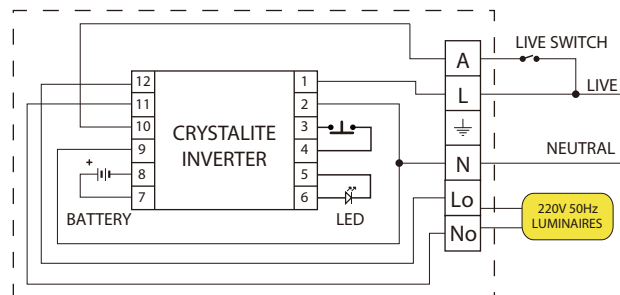

Common LED Tube Connection Diagram



LED TUBES



"CRYSTALITE" CAT. CC-PI-LED-K3

Technical Data

Model	CC-P1-LED-K2	CC-P2-LED-K2	CC-P1-LED-K3	CC-P2-LED-K3
Emergency Output	Subject to sample Testing			
Discharge Duration	2 Hours		3 Hours	
Battery	Sealed Ni-cd /Ni-mh High Temperature Rechargeable Battery			
	9.6V 1.8Ah		9.6V 2.2Ah	
Line Voltage	A/C 220V~240V +6%, -10% 50Hz			
Low Voltage Discharge Protection	Electronic Protection for approximate 1V per cell			
Operating Temperature	0°C - 50°C			
Transfer Time	< 0.3 Second			
Recharge Period	12 Hours for 2 Hours discharge / 24 Hours for 3 Hours discharge			
Compliance	BS EN 60598-2-22, BS EN 61347-2-7, BS 5266-1, FSD PPA 104A (4 th Revision)			

Remark: This product does not include the metal box



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice