

# "PANEL-T5" SERIES


"Panel-T5" 系列

## Description

A surface mounting emergency lighting panel designed to suit the environment of the exit corridor of the shopping centers, hotels and offices. The lighting panel is made of GMS housing with white powder coating and flame retardant clear prismatic diffuser. The lighting panel is more elegant than the traditional lighting batten at commercial area. The whole emergency luminaire has passed the 850°C hot wire test of BS EN 60598-2-22 and FSD PPA 104A (4<sup>th</sup> Revision) standard.



"CRYSTALITE" Cat. Panel-T5-14-N2

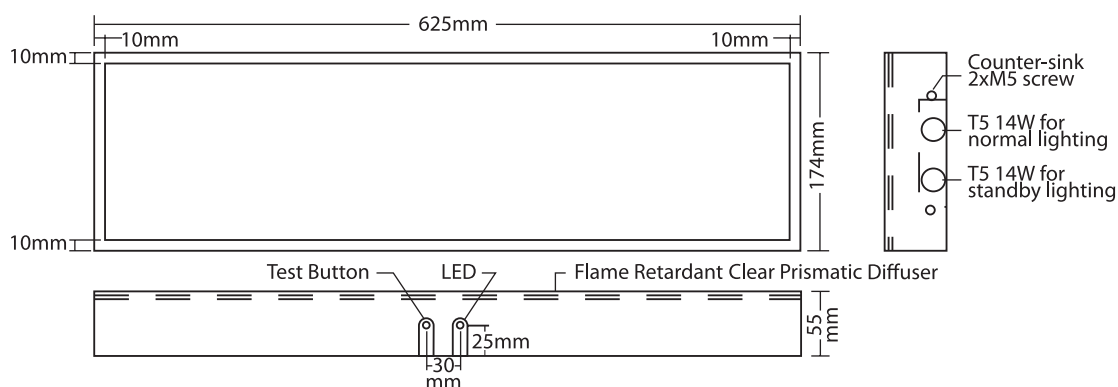

## Technical Data

Model	Panel-T5-14-N2
Suitable Tubes	T5 14Wx2 (One for Normal Lighting/ One for Standby Lighting)
Emergency Output	750 lumens
Discharge Duration	2 Hours
Battery	Sealed Ni-cd High Temperature Rechargeable Battery 12V 2.2Ah
Line Voltage	A/C 220V~240V +6%, -10% 50Hz
Low Voltage Discharge Protection	Electronic Protection for approximate 1V per cell
Operating Temperature	0°C - 50°C
Transfer Time	< 0.3 Second
Recharge Period	12 Hours
Compliance	BS EN 60598-2-22, BS EN 61347-2-7, BS 5266-1, FSD PPA 104A (4 <sup>th</sup> Revision)

**Option:** Sealed Ni-mh High Temperature Rechargeable Battery is available upon request.



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM  
Content is subject to change without notice