


“WP-CWL” SERIES

Weatherproof Emergency Compact Fluorescent Lighting System

“WP-CWL” 系列，戶外用防水電池內藏 Compact Fluorescent Lamp 緊急照明系統 IP65


Description

The “WP-CWL” series, maintained type, weatherproof emergency compact fluorescent lighting system to IP65, performs both normal and emergency duties. The prismatic diffuser and housing are made of polycarbonate and metal respectively. It contains all the emergency lighting control gear components such as electronic ballast and battery for high efficiency operation of the emergency compact fluorescent lamps. The weatherproof emergency fluorescent fitting complies with FSD PPA 104A (4th revision) including 850°C hot wire test.

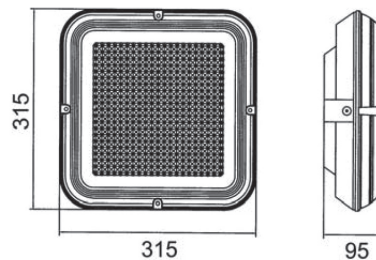

“CRYSTALITE” Cat. CC-40-K2+CWL128

1x2D 28W Emergency fluorescent lighting system, c/w IP65 weatherproof fitting



“CRYSTALITE” Cat. CC-40-K2+CWL 128C

All Dimensions are in mm.

Technical Data

Model	CC-40-K2 + CWL128	CC-40-K2+CWL 128C
Suitable Tubes	2D 28W	
Emergency Output	30%	
Discharge Duration	2 Hours	
Battery	Sealed Ni-cd High Temperature Rechargeable Battery 9.6V 2.2Ah	
Line Voltage	A/C 220V~240V +6%, -10% 50Hz	
Low Voltage Discharge Protection	Electronic Protection for approximate 1V per cell	
Operating Temperature	0°C - 50°C	
Transfer Time	< 0.3 Second	
Recharge Period	12 Hours	
Compliance	BS EN 60598-2-22, BS EN 61347-2-7, BS 5266-1, FSD PPA 104A (4 th Revision)	



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice