

"CC-AK" SERIES


750-1000 Lumens Conversion Kit

Description

This series will enable the designer to select the emergency fluorescent kits which can maintain at a certain level of emergency light source. The light will evenly distribute in the area whatever the length of the fluorescent tube.

Specification

Self-contained, maintained type emergency power pack with automatic changeover device giving out not less than 750 lumen output for 2 hours emergency battery discharge.

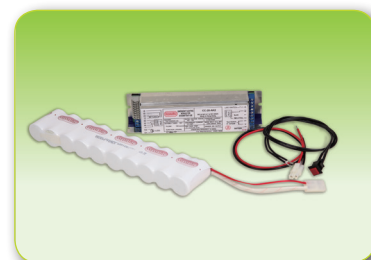

"CRYSTALITE" Cat. CC-65-AK2
1x58W Conversion kit

Technical Data

Model	CC-20-AK2	CC-40-AK2	CC-65-AK2
Suitable Tubes	18/20W	30/36/40W	58/65W
Emergency Output	750 lumens	750 lumens	1000 lumens
Discharge Duration	2 Hours		
Battery	Sealed Ni-cd High Temperature Rechargeable Battery		
	12V 2.2Ah	9.6V 4.0Ah	9.6V 4.0Ah
Line Voltage	A/C 220V~240V +6%, -10% 50Hz		
Low Voltage Discharge Protection	Electronic Protection for approximate 1V per cell		
Operating Temperature	0°C - 50°C		
Transfer Time	< 0.3 second		
Recharge Period	12 Hours		
Compliance	BS EN 60598-2-22, BS EN 61347-2-7, BS 5266-1, FSD PPA 104A (4 th Revision)		


Model	CC-20-AK2-GC	CC-40-AK2-GC	CC-65-AK2-GC
Suitable Tubes	18/20W	30/36/40W	58/65W
Emergency Output	750 lumens	750 lumens	1000 lumens
Discharge Duration	2 Hours		
Battery	Sealed Ni-mh High Temperature Rechargeable Battery		
	12V 2.2Ah	9.6V 4.0Ah	9.6V 4.0Ah
Line Voltage	A/C 220V~240V +6%, -10% 50Hz		
Low Voltage Discharge Protection	Electronic Protection for approximate 1V per cell		
Operating Temperature	0°C - 50°C		
Transfer Time	< 0.3 second		
Recharge Period	12 Hours		
Compliance	BS EN 60598-2-22, BS EN 61347-2-7, BS 5266-1, FSD PPA 104A (4 th Revision)		

"GREEN-CELL-CC" SERIES


Environmental Protection – Green Cell
環保綠色電池套件 CC Series

Application

GREEN-CELL-CC Series provides an alternative in using high temperature nickel metal hydride(Ni-mh) rechargeable battery pack in the conversion unit.

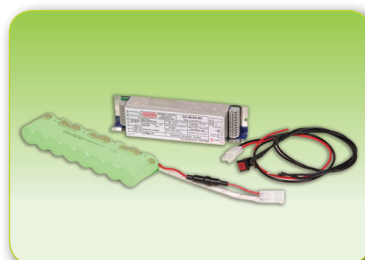

"CRYSTALITE" Cat. CC-20-K2-GC
1x20W Conversion kit

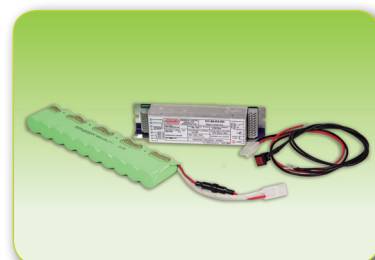

"CRYSTALITE" Cat. CC-40-K2-GC
1x40W Conversion kit

Technical Data

Model	CC-20-K2-GC	CC-40-K2-GC	CC-65-K2-GC
Suitable Tubes	18/20W	30/36/40W	58/65W
Emergency Output	350 lumens	580 lumens	650 lumens
Discharge Duration	2 Hours		
Battery	Sealed Ni-mh High Temperature Rechargeable Battery		
	6V 2.2Ah	9.6V 2.2Ah	12V 2.2Ah
Line Voltage	A/C 220V~240V +6%, -10% 50Hz		
Low Voltage Discharge Protection	Electronic Protection for approximate 1V per cell		
Operating Temperature	0°C - 50°C		
Transfer Time	< 0.3 Second		
Recharge Period	12 Hours		
Compliance	BS EN 60598-2-22, BS EN 61347-2-7, BS 5266-1, FSD PPA 104A (4 th Revision)		

Model	CC-20-K3-GC	CC-40-K3-GC	CC-65-K3-GC
Suitable Tubes	18/20W	30/36/40W	58/65W
Emergency Output	350 lumens	580 lumens	650 lumens
Discharge Duration	3 Hours		
Battery	Sealed Ni-mh High Temperature Rechargeable Battery		
	7.2V 2.2Ah	12V 2.2Ah	9.6V 4.0Ah
Line Voltage	A/C 220V~240V +6%, -10% 50Hz		
Low Voltage Discharge Protection	Electronic Protection for approximate 1V per cell		
Operating Temperature	0°C - 50°C		
Transfer Time	< 0.3 Second		
Recharge Period	12 Hours For 2 Hours discharge / 24 Hours For 3 Hours discharge		
Compliance	BS EN 60598-2-22, BS EN 61347-2-7, BS 5266-1, FSD PPA 104A (4 th Revision)		



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice