

"HALO-LITE" DECORATIVE TYPE POWER LED SERIES

LED 雙眼龍 (裝飾用) 系列

This is specially designed for interior decoration works with very slim size

Application

- Power LED Lamps with 50,000 working hours
- High efficiency
- Durable
- Wall-mount / Recess Ceiling-mount
- GMS box with white powder coating
- Maintenance free

Specification

Wall-mount / Recess Ceiling-mount, self-contained, nonmaintained type, dual spot luminaire with automatic changeover device for minimum 3 hours emergency battery discharge.




Standards

- BS 5266 – Part I
- BS EN 60598-2-22 (850°C hot wire test)
- FSD PPA 104(A) 4th Revision


Panel Status

Test	●
Mains On	●
Charging	●
Fault	●

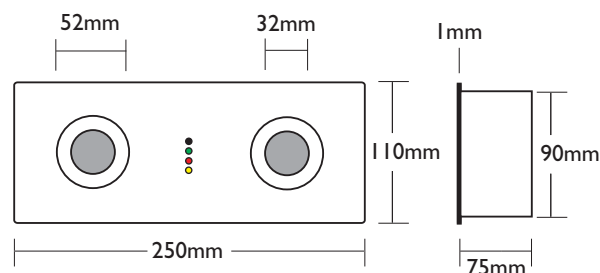

Recessed Box Size: 230 x 90 x 75mm

"CRYSTALITE" Cat. CE-DPC-2X3W-N

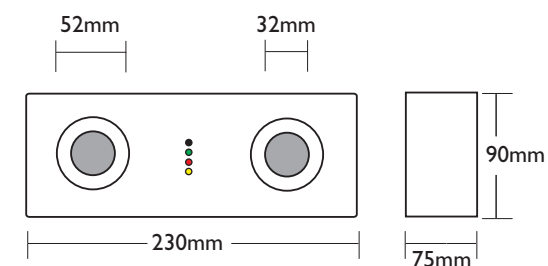

"CRYSTALITE" Cat. CE-DPW-2X3W-N

Technical Data

Model	CE-DPC-2X3W-N	CE-DPW-2X3W-N
System Mode	Non-Maintained Type	
Mounting	Ceiling-mount	Wall-mount
Emergency Output	2 x 3W Power LED	
Discharge Duration	3 Hours	
Battery	Sealed Ni-cd/Ni-mh High Temperature Battery 6V 2.2Ah	
Line Voltage	A/C 220V~230V 50Hz +6%-10%	
Compliance	BS EN 60598-2-22 ; BS 5266-1, FSD PPA 104A (4 th Revision)	



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice