

“BI-LITE” DECORATIVE TYPE POWER LED SERIES

LED 貓燈 (裝飾) 系列

Application

- Power LED Lamps with 50,000 working hours
- High efficiency
- Durable
- Wall-mount
- GMS box with white powder coating
- Maintenance free

Specification

Surface mount, self-contained, non-maintained type, twin spot luminaire with automatic changeover device for minimum 3 hours emergency battery discharge.

Standards


- BS 5266 – Part I
- BS EN 60598-2-22 (850°C hot wire test)
- FSD PPA 104(A) 4th Revision

Panel Status

Test	●
Mains On	●
Charging	●
Fault	●



“CRYSTALITE” Cat. CE-LED-2X3W-N

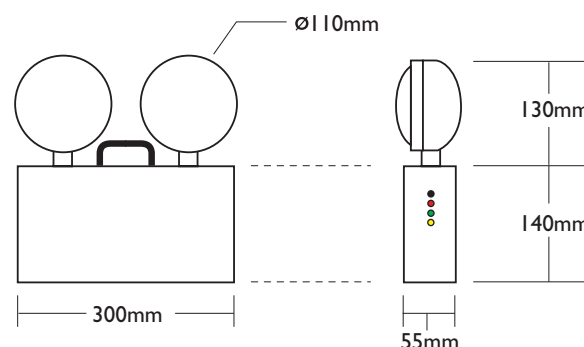

Technical Data

Model	CE-LED-2X3W-N
System Mode	Non-Maintained Type
Mounting	Wall-mount
Emergency Output	2 x 3W Power LED
Discharge Duration	3 Hours
Battery	Sealed Ni-cd/Ni-mh High Temperature Battery 6V 2.2Ah
Recharge Period	12 Hours For 2 Hours discharge / 24 Hours For 3 Hours discharge
Line Voltage	A/C 220V~240V 50Hz +6%-10%
Compliance	BS EN 60598-2-22 ; BS 5266-1, FSD PPA 104A(4 th Revision)



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice