

# “LED WEATHER-PROOF HALO-LITE” IP66 SERIES

LED 防水魚眼貓系列

## Application

- Power LED Lamps with 50,000 working hours
- High efficiency
- Durable
- Wall-mount type
- Weather-Proof IP66
- Maintenance free


## Specification

Wall-mount, self-contained, non-maintained weather-proof type, dual spot luminaire with automatic changeover device for minimum 3 hours emergency battery discharge.


## Standards

- BS 5266 – Part I
- BS EN 60598-2-22 (850°C hot wire test)
- FSD PPA 104(A) 4<sup>th</sup> Revision

## Panel Status



“CRYSTALITE” Cat. CE-DPW-2X3W-WP

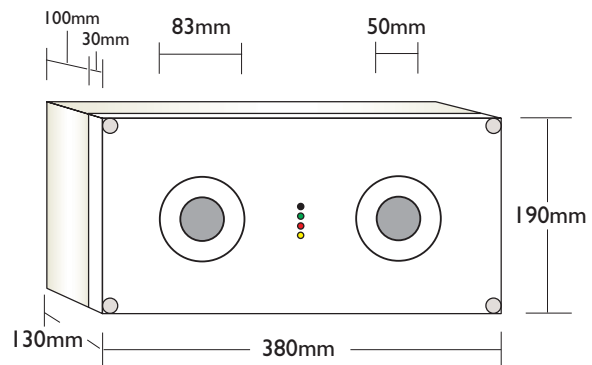

## Technical Data

Model	CE-DPW-2X3W-WP
System Mode	Non-Maintained Type
Mounting	Wall-mount
Emergency Output	2 x 3W Power LED
Discharge Duration	3 Hours
Battery	Sealed Ni-cd/Ni-mh High Temperature Battery 6V 2.2Ah
Recharge Period	12 Hours For 2 Hours discharge / 24 Hours For 3 Hours discharge
Line Voltage	A/C 220V~240V 50Hz +6%-10%
Compliance	BS EN 60598-2-22 ; BS 5266-1, FSD PPA 104A (4 <sup>th</sup> Revision)



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM  
Content is subject to change without notice