

POWER LED SERIES

Power LED 電池系列

Remarks: This is specially designed for ASD's project and maintenance works.

Application

- Power LED Lamps with 50,000 working hours
- High efficiency
- Durable
- Wall-mount / Recess Ceiling-mount
- GMS box with white powder coating
- Maintenance free

Specification

Wall-mount / Recess Ceiling-mount, self-contained, nonmaintained type, LED luminaire with automatic changeover device for minimum 3 hours emergency battery discharge.

Standards

- BS 5266 – Part I
- BS EN 60598-2-22 (850°C hot wire test)
- FSD PPA 104(A) 4th Revision

Panel Status

Test	●
Mains On	●
Charging	●
Fault	●


Technical Data

Model	CE-LED-20-HCN2-GC	CE-LED-20-HCN3-GC	CE-LED-20-HWN2-GC	CE-LED-20-HWN3-GC
System Mode	Non-Maintained Type			
Mounting	Ceiling-mount		Wall-mount	
Emergency Output	2 x 3W Power LED			
Discharge Duration	2 Hours	3 Hours	2 Hours	3 Hours
Battery	Sealed Ni-mh High Temperature Battery			
	9.6V 2.2Ah	9.6V 4.0Ah	9.6V 2.2Ah	9.6V 4.0Ah


Model	CS-LED-6-10C-K2-GC	CS-LED-6-10W-K2-GC	CE-LED-21N-2-GC	CE-LED-21N-3-GC
System Mode	Non-Maintained Type			
Mounting	Ceiling-mount	Wall-mount	Wall-mount	
Emergency Output	3W Power LED		2 x 3W Power LED	
Discharge Duration	2 Hours		2 Hours	3 Hours
Battery	Sealed Ni-mh High Temperature Battery			
	6V 2.2Ah		9.6V 2.2Ah	9.6V 4.0Ah
Recharge Period	12 Hours for 2 Hours discharge / 24 Hours for 3 Hours discharge			
Line Voltage	A/C 220V~240V 50Hz +6%-10%			
Compliance	BS EN 60598-2-22 ; BS 5266-1, FSD PPA 104A (4 th Revision)			




"CRYSTALITE" Cat. CE-LED-20-HCN2-GC & CE-LED-20-HCN3-GC

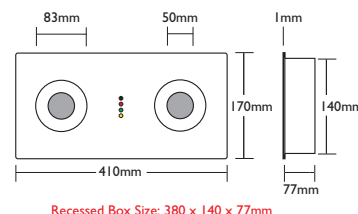


"CRYSTALITE" Cat. CE-LED-20-HWN2-GC & CE-LED-20-HWN3-GC



"CRYSTALITE" Cat. CS-LED-6-10C-K2-GC



"CRYSTALITE" Cat. CS-LED-6-10W-K2-GC



"CRYSTALITE" Cat. CE-LED-21N-2-GC & CE-LED-21N-3-GC

