

"UFO" NON-MAINTAINED LED SERIES

LED飛碟系列

Application

- For Hotel guest room
- Power LED Lamps
- High efficiency
- Durable
- Recess Ceiling-mount
- GMS box with white powder coating
- Maintenance free
- c/w a LED lamp source

Standards


- BS 5266 – Part I
- BS EN 60598-2-22 (850°C hot wire test)
- FSD PPA 104(A) 4th Revision

Specification

Recess Ceiling-mount, self-contained, non-maintained type, emergency 1x3W LED downlight with automatic changeover device for minimum 3 hours emergency battery discharge.



"CRYSTALITE" Cat. CS-LED-3W

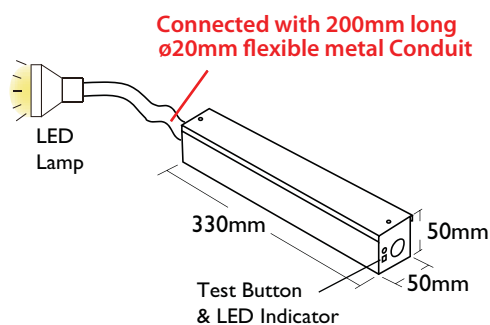

LED Lamp Dimension: ø85mm
Ceiling Cutout: ø75mm

Technical Data

Model	CS-LED-3W
System Mode	Non-Maintained Type
Mounting	Ceiling-mount
Emergency Output	3W LED Lamp
Discharge Duration	3 Hours
Battery	Sealed Ni-cd /Ni-mh High Temperature Battery 6V 1.5Ah
Recharge Period	12 Hours
Line Voltage	A/C 220V~230V 50Hz +6%-10%
Compliance	BS EN 60598-2-22 ; BS 5266-1, FSD PPA 104A (4 th Revision)



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice