

"LED RECESS-LITE" EXIT SIGN SERIES

Features

- Slim and compact
- Recessed-mount
- Single-face application
- Minimum maintenance
- Lower power consumption
- c/w light guide panel
- Option: Flashing upon actuation by fire signal (dry contact)

Legend

Exit Sign




Directional Sign



"CRYSTALITE" Cat. CX-LED-165-B-RL

Graphical symbol exit sign

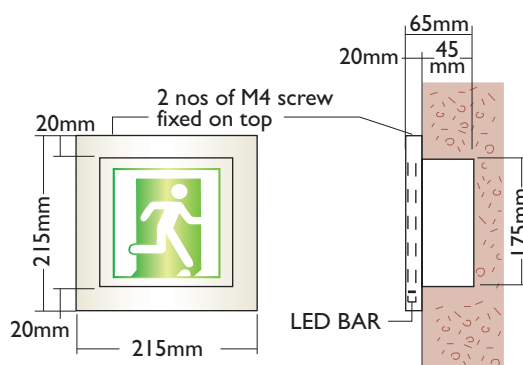


Recessed Box Size: 195 x 175 x 45mm



"CRYSTALITE" Cat. CX-LED-220-B-RL

Directional sign

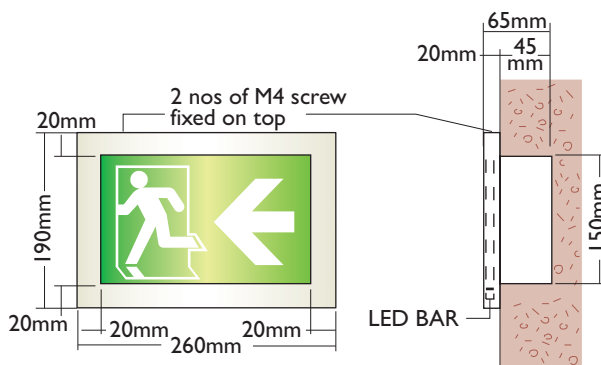

Recessed Box Size: 240 x 150 x 45mm

Technical Data

Model	CX-LED-165-B-RL	CX-LED-220-B-RL
	GMS with white powder coating	
Lamp	Super Bright LED Line	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours	
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh	
Power Consumption	~3W	
Operating Temperature	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4th Revision); FSD Code of Practice Clause 5.10 Exit Sign	



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice