

# "LED MAGNET-LITE" EXIT SIGN SERIES

## Features

- Flushed-wall type exit sign
- Specially designed for decorative surface
- Magnetic type cover with safety chains
- Minimum maintenance
- Lower power consumption
- Single-face application
- Option: Flashing upon actuation by fire signal (dry contact)

## Legend


### Exit Sign




### Directional Sign



"CRISTALITE" Cat. CX-LED-165-B-MG

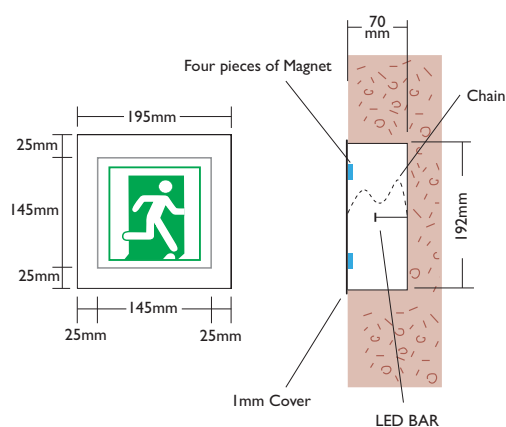

"CRISTALITE" Cat. CX-LED-220-B-MG

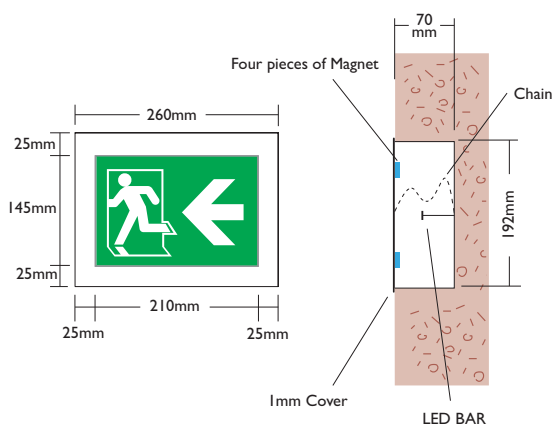

## Technical Data

Model	CX-LED-165-B-MG	CX-LED-220-B-MG
	GMS with white powder coating	
Lamp	Super Bright LED Line	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours	
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh	
Power Consumption	~3W	
Operating Temperature	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 <sup>th</sup> Revision); FSD Code of Practice Clause 5.10 Exit Sign	