

"LED FRAMELESS" EXIT SIGN SERIES

Features

- Frameless type of flushed plate with 4 screws surface fixing
- Recessed-mount
- Minimum maintenance
- Lower power consumption
- Single-face application
- Option: Flashing upon actuation by fire signal (dry contact)

Legend


Exit Sign



Directional Sign



CX-LED-220-B-FM

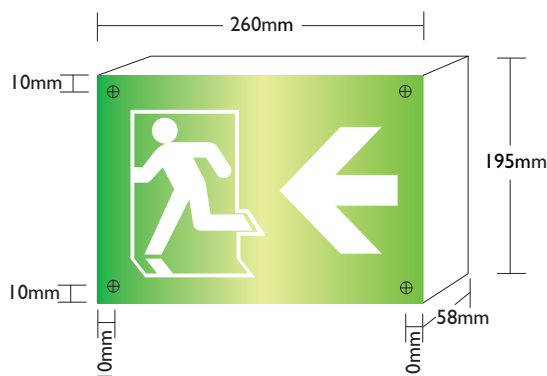

Technical Data

Model	CX-LED-220-B-FM
	GMS with white powder coating
Lamp	Super Bright LED Line
Line Voltage	A/C 220V~240V 50Hz +6%-10%
Discharge Duration	3 Hours
Recharge Period	12 Hours
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh
Power Consumption	~3W
Operating Temperature	0°C - 50°C
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 th Revision); FSD Code of Practice Clause 5.10 Exit Sign