

"LED SCREW-LITE" EXIT SIGN SERIES

Features

- Bottom access with screw type fixing cover
- Short metal case for low ceiling headroom
- Ceiling-mount, recessed type
- Single-face or double-face application
- Minimum maintenance
- Lower power consumption
- c/w clear acrylic panel
- Option: Flashing upon actuation by fire signal (dry contact)

Legend

Exit Sign



Directional Sign






"CRYSTALITE" Cat. CX-LED-165-P-SOL



"CRYSTALITE" Cat. CX-LED-220-P-SOL



"CRYSTALITE" Cat. CX-LED-220-P-SOL-V-H
Hairline s/s cover

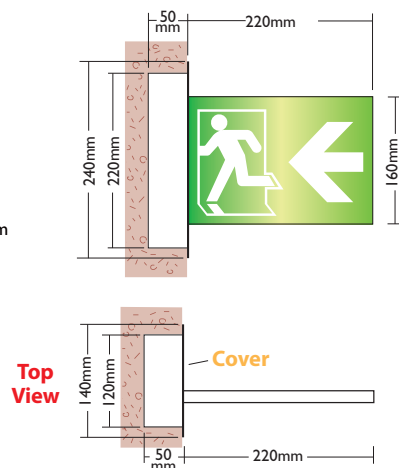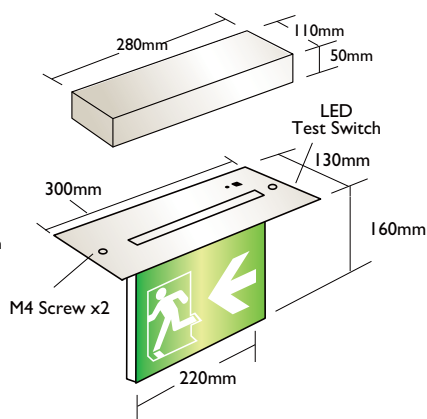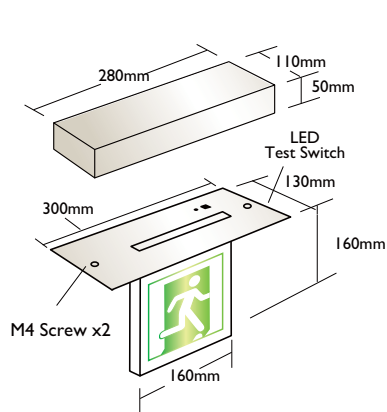

Technical Data

Model	CX-LED-165-P-SOL	CX-LED-220-P-SOL	CX-LED-220-P-SOL-V-H
Box	GMS with white powder coating		
Cover	GMS with white paint		Hairline Stainless Steel
Lamp	Super Bright LED Line		
Line Voltage	A/C 220V~240V 50Hz +6%-10%		
Discharge Duration	3 Hours		
Recharge Period	12 Hours		
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh		
Power Consumption	~3W		
Operating Temperature	0°C - 50°C		
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 th Revision); FSD Code of Practice Clause 5.10 Exit Sign		



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice