

"LED WEATHER-PROOF IP66" EXIT SIGN SERIES

Features

- Weather-Proof IP66
- For wet or dusty severe environments
- Wall-mount
- Single-face application
- Minimum maintenance
- Lower power consumption
- Option: Flashing upon actuation by fire signal (dry contact)

Legend

Exit Sign



Directional Sign




Specification

Surface mounted, self-contained, maintained type, super bright white LED exit sign box with automatic changeover device for 3 hours emergency battery discharge.




"CRYSTALITE" Cat. CX-LED-150-B-WL

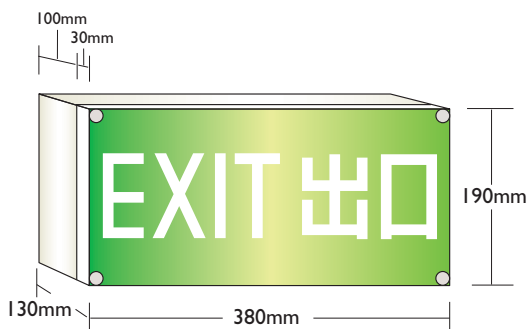

Lettering in 125mm height



"CRYSTALITE" Cat. CX-LED-150-B-WL(175)

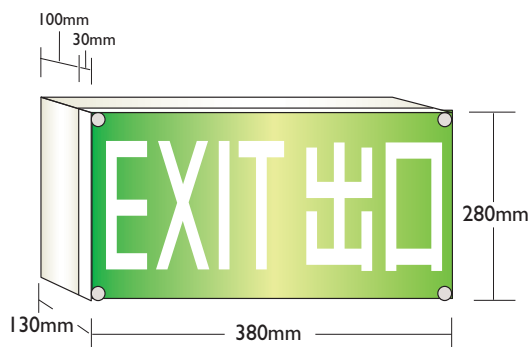

Lettering in 175mm height

Technical Data

Model	CX-LED-150-B-WL	CX-LED-150-B-WL(175)
	PolyCarbonate Cover, IP 66	
Lamp	Super Bright LED Line	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours	
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh	
Power Consumption	~5W	
Operating Temp	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 th Revision); FSD Code of Practice Clause 5.10 Exit Sign	

Remark: Building for public entertainment require 175mm height for the words



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice