

"LED SLIM-LITE HINGE TYPE" EXIT SIGN SERIES

Features

- Two hinges on top of the box
- Slim and compact
- Single-face wall-mount, double-face ceiling mount
- Minimum maintenance
- Lower power consumption
- c/w light guide panel
- Option: Flashing upon actuation by fire signal (dry contact)

Specification

Surface mounted, self-contained, maintained type, super bright white LED exit sign box with automatic changeover device for 3 hours emergency battery discharge.

Legend


Exit Sign




Directional Sign



"CRYSTALITE" Cat. CX-LED-405-B

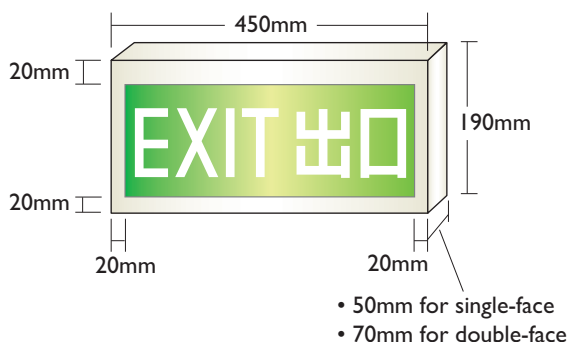

"CRYSTALITE" Cat. CX-LED-570-B

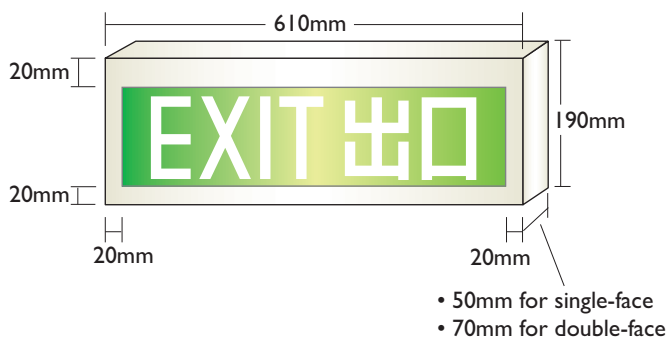

Technical Data

Model	CX-LED-405-B	CX-LED-570-B
	GMS with white powder coating	
Lamp	Super Bright LED Line	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours	
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh	
Power Consumption	Single-face : ~3W / Double-face : ~5W	
Operating Temp	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 th Revision); FSD Code of Practice Clause 5.10 Exit Sign	