

## ***"LED ANGLE-LITE" EXIT SIGN SERIES***

## Features

- Slim and compact triangular box
- Specially design for limited headroom
- Single-face application
- Compatible to Wall-mount and Ceiling mount
- Minimum maintenance
- Lower power consumption
- c/w light guide panel
- Option: Flashing upon actuation by fire signal (dry contact)

### Legend

## Exit Sign



### Directional Sign



## Specification


Surface mounted, self-contained, maintained type, super bright white LED exit sign box with automatic changeover device for 3 hours emergency battery discharge.



**"CRYSTALITE" Cat. CX-LED-405-B-AGL**



**"CRYSTALITE" Cat. CX-LED-570-B-AGL**

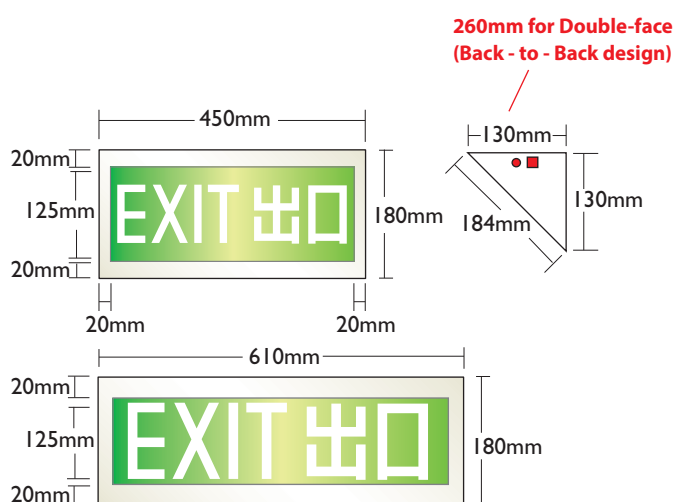

## Technical Data

Model	CX-LED-405-B-AGL	CX-LED-570-B-AGL
	GMS with white powder coating	
Lamp	Super Bright LED Line	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours	
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh	
Power Consumption	Single-face : ~3W / Double-face : ~5W	
Operating Temp	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 <sup>th</sup> Revision); FSD Code of Practice Clause 5.10 Exit Sign	