

"LED RECESS-LITE" EXIT SIGN SERIES

Features



- Slim and compact
- Recessed-mount
- Minimum maintenance
- Lower power consumption
- c/w light guide panel
- Option: Flashing upon actuation by fire signal (dry contact)

Legend

Exit Sign



Directional Sign

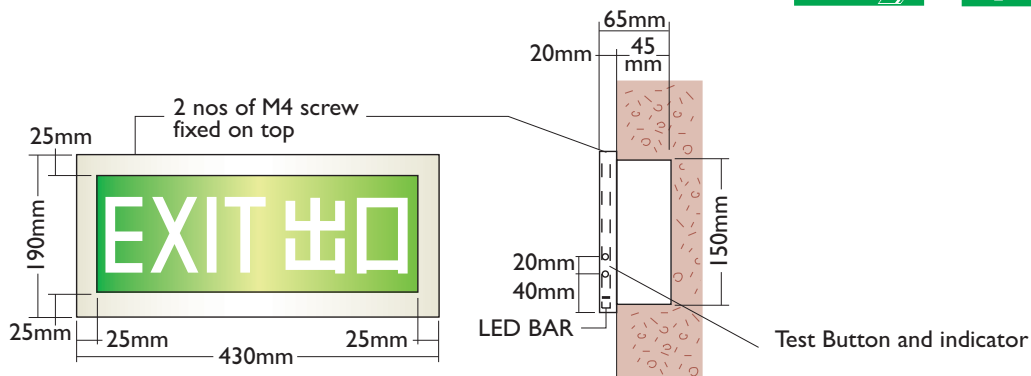

Recessed Box size: 410 x 150 x 45mm



"CRYSTALITE" Cat. CX-LED-405-B-RL



"CRYSTALITE" Cat. CX-LED-405-B-RL-H
Hairline stainless steel finishing cover

Technical Data

Model	CX-LED-405-B-RL	CX-LED-405-B-RL-H
Cover	GMS with white powder coating	Hairline S/S finishing
Lamp	Super Bright LED Line	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours	
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh	
Power Consumption	Single-face : ~3W	
Operating Temp	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 th Revision); FSD Code of Practice Clause 5.10 Exit Sign	



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice