

"LED DELUXE-LITE" EXIT SIGN SERIES

Features

- 90mm diameter GMS rod with white powder coating
- Deluxe and elegant
- Wall-mount
- Single-face application
- Minimum maintenance
- Lower power consumption
- c/w Clear acrylic panel
- Option: Flashing upon actuation by fire signal (dry contact)

Legend


Exit Sign




Directional Sign



"CRYSTALITE" Cat. CX-LED-405-P-DL

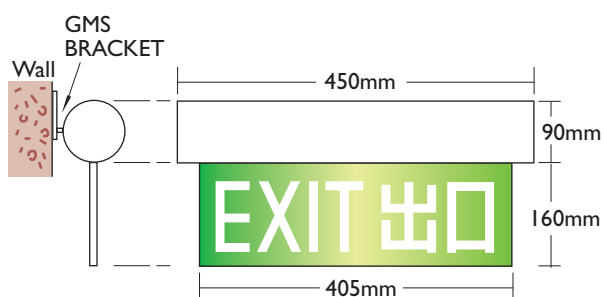

"CRYSTALITE" Cat. CX-LED-570-P-DL

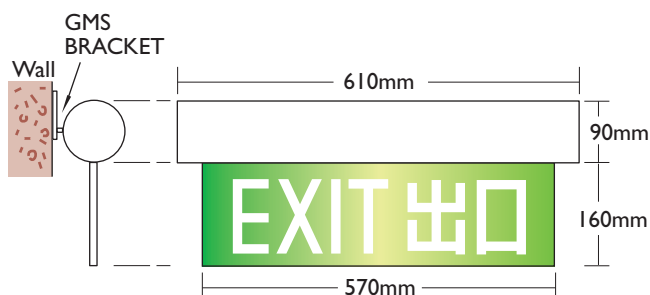

Technical Data

Model	CX-LED-405-P-DL	CX-LED-570-P-DL
	GMS with white powder coating	
Lamp	Super Bright LED Line	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours	
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh	
Power Consumption	~3W	
Operating Temp	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 th Revision); FSD Code of Practice Clause 5.10 Exit Sign	

"LED DELUXE-LITE SUPREME" EXIT SIGN SERIES

Features

- 90mm diameter stainless steel rod
- Deluxe and elegant
- Wall-mount
- Single-face application
- Minimum maintenance
- Lower power consumption
- c/w Clear acrylic panel
- Option: Flashing upon actuation by fire signal (dry contact)

Legend


Exit Sign




Directional Sign



"CRYSTALITE" Cat. CX-LED-405-P-DL-M
Mirror stainless steel finishing

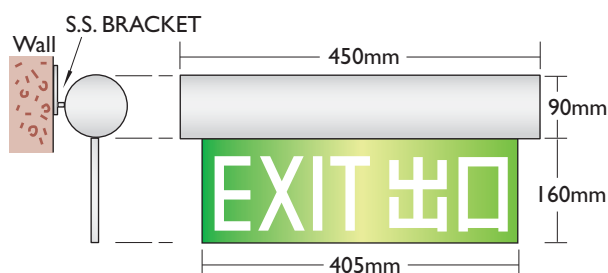

"CRYSTALITE" Cat. CX-LED-570-P-DL-H
Hairline stainless steel finishing

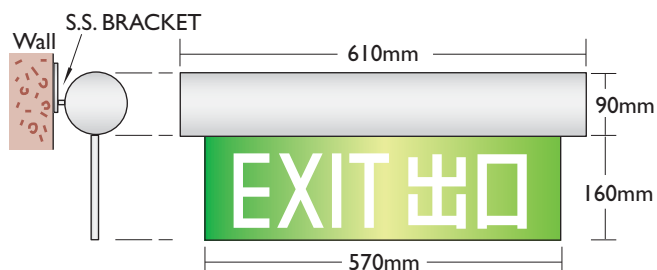

Technical Data

Model	CX-LED-405-P-DL-H Hairline s/s finishing	CX-LED-570-P-DL-H Hairline s/s finishing
	CX-LED-405-P-DL-M Mirror s/s finishing	CX-LED-570-P-DL-M Mirror s/s finishing
	CX-LED-405-P-DL-G Golden plating finishing	CX-LED-570-P-DL-G Golden plating finishing
Lamp	Super Bright LED Line	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours	
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh	
Power Consumption	~3W	
Operating Temp	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 th Revision); FSD Code of Practice Clause 5.10 Exit Sign	



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice