

"LED ALLUM-LITE" EXIT SIGN SERIES

Features

- Die-cast aluminum surface-mount
- Made of high strength aluminum alloy casing
- Single-face wall-mount, double-face ceiling mount
- Minimum maintenance
- Lower power consumption
- c/w Clear acrylic panel
- Option: Flashing upon actuation by fire signal (dry contact)

Legend


Exit Sign




Directional Sign



"CRYSTALITE" Cat. CX-LED-405-P-AL
Aluminum Alloy Casing

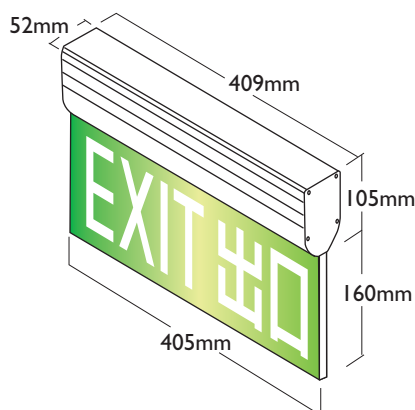

"CRYSTALITE" Cat. CX-LED-570-P-AL
Aluminum Alloy Casing

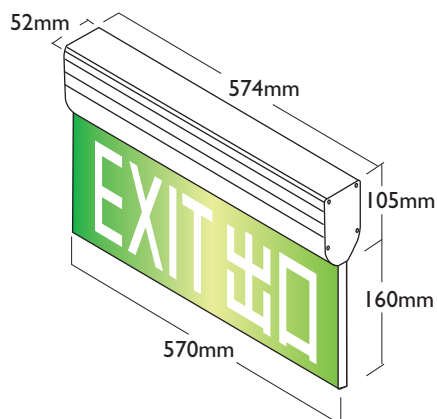

Technical Data

Model	CX-LED-405-P-AL	CX-LED-570-P-AL
	Aluminum Alloy Casing	
Lamp	Super Bright LED Line	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours	
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh	
Power Consumption	~3W	
Operating Temp	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 th Revision); FSD Code of Practice Clause 5.10 Exit Sign	

"LED ALLOY-LITE" EXIT SIGN SERIES

Features

- Die-cast aluminum surface-mount
- Made of high strength aluminum alloy casing
- Single-face wall-mount, double-face ceiling mount
- Minimum maintenance
- Lower power consumption
- c/w Clear acrylic panel
- Option: Flashing upon actuation by fire signal (dry contact)

Legend


Exit Sign



Directional Sign



"CRYSTALITE" Cat. CX-LED-570-P-AOL
Aluminum Alloy Casing

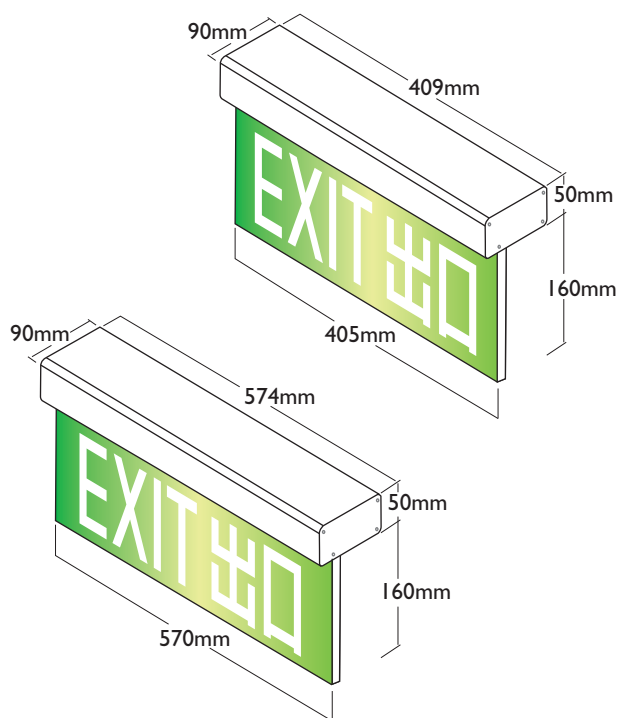

Technical Data

Model	CX-LED-405-P-AOL	CX-LED-570-P-AOL
	Aluminum Alloy Casing	
Lamp	Super Bright LED Line	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours	
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh	
Power Consumption	~3W	
Operating Temp	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 th Revision); FSD Code of Practice Clause 5.10 Exit Sign	



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice