

"LED CONCORD-LITE" EXIT SIGN SERIES

Features

- Semi-circular shape
- GMS with white powder coating or golden paint finishing
- Classic and elegant
- Wall-mount
- Single-face application
- Minimum maintenance
- Lower power consumption
- c/w clear acrylic panel
- Option: Flashing upon actuation by fire signal (dry contact)

Legend

Exit Sign




Directional Sign




"CRYSTALITE" Cat. CX-LED-405-P-COL-G

Golden paint finishing

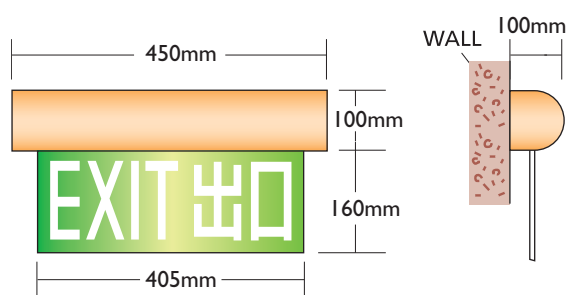

"CRYSTALITE" Cat. CX-LED-570-P-COL-G

Golden paint finishing

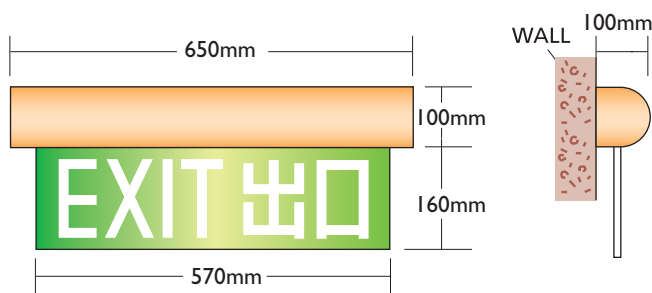

Technical Data

Model	CX-LED-405-P-COL GMS with white powder coating	CX-LED-570-P-COL GMS with white powder coating
	CX-LED-405-P-COL-G Golden paint finishing	CX-LED-570-P-COL-G Golden paint finishing
Lamp	Super Bright LED Line	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours	
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh	
Power Consumption	~3W	
Operating Temp	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 th Revision); FSD Code of Practice Clause 5.10 Exit Sign	

"LED CONCORD-VERTICAL-LITE" EXIT SIGN SERIES

Features

- Vertically semi-circular shape
- GMS with white powder coating or golden paint finishing
- Classic and elegant
- Ceiling-mount
- Single-face or double-face application
- Minimum maintenance
- Lower power consumption
- c/w Clear acrylic panel
- Option: Flashing upon actuation by fire signal (dry contact)



CX-LED-405-P-COLV-G



Golden paint finishing

Legend

Exit Sign



Directional Sign

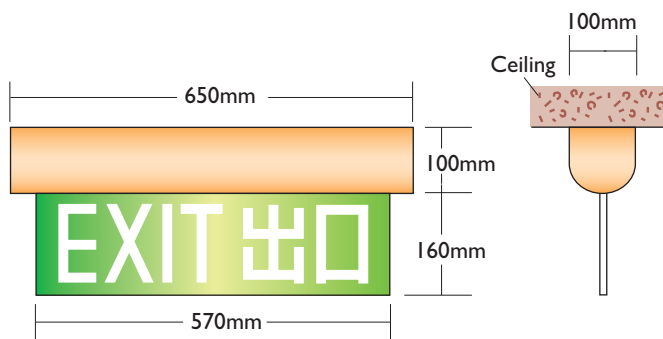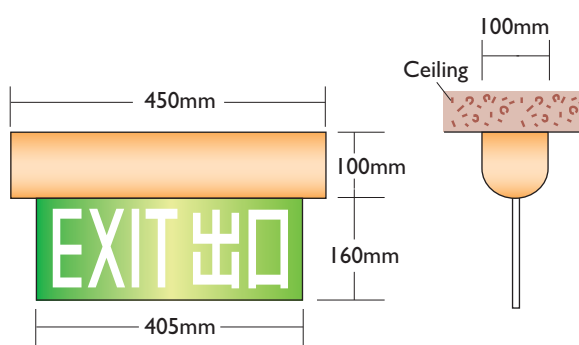

Technical Data

Model	CX-LED-405-P-COLV GMS with white powder coating	CX-LED-570-P-COLV GMS with white powder coating
	CX-LED-405-P-COLV-G Golden paint finishing	CX-LED-570-P-COLV-G Golden paint finishing
Lamp	Super Bright LED Line	
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours	
Battery	Sealed Ni-cd/ Ni-mh High Temperature Rechargeable Battery 14.4V 800mAh	
Power Consumption	~3W	
Operating Temp	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 th Revision); FSD Code of Practice Clause 5.10 Exit Sign	



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice