
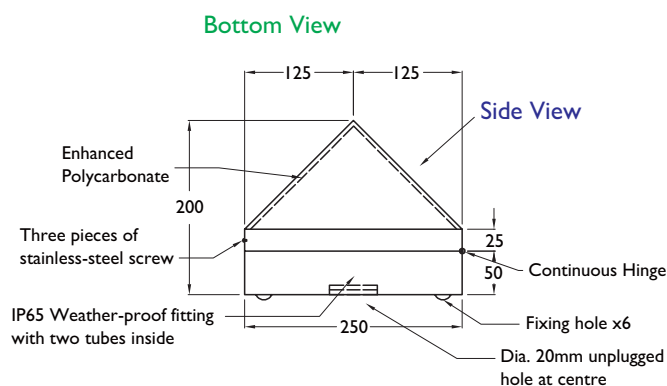


"TUNNEL-LITE" EXIT SIGN SERIES

Features

- Specially designed for tunnel location
- Vertical with triangular shape provide wide viewing angle
- Enhanced polycarbonate sheet can withstand strong wind
- Hairline stainless-steel casing for long-lasing
- Wall-mount
- Minimum maintenance
- Include a IP65 weather-proof batten with two tubes

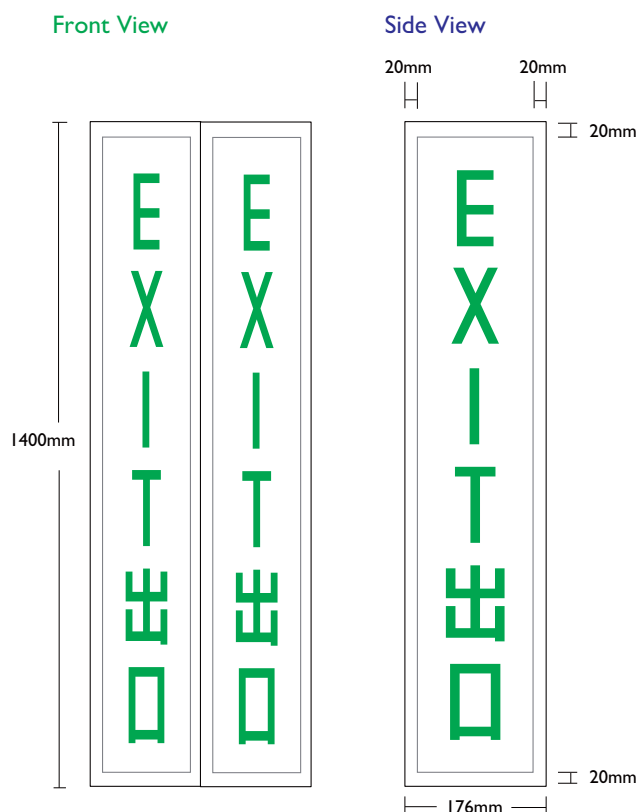

Technical Data

"CRYSTALITE" Cat. CX-LED-1400-B-TN-H & CX-T5-28-NB3-TN-H

Model	CX-LED-1400-B-TN-H	CX-T5-28-NB3-TN-H
	Hairline stainless steel finishing	
Lamp	2 x Philips 1200mm LED Tubes	2 x T5 28w fluorescent Tubes
Emergency Output	(Normal Operation: 2 Tubes On) / (Emergency Operation: 2 Tubes On)	
	100%	50%
Line Voltage	A/C 220V~240V 50Hz +6%-10%	
Discharge Duration	3 Hours	
Recharge Period	12 Hours for 2 Hours discharge / 24 Hours for 3 Hours discharge	
Battery	Sealed Ni-cd/Ni-mh High Temperature Recharge Battery	
	2 x 12V 5Ah	2 x 12V 4Ah
Operating Temp	0°C - 50°C	
Compliance	BS EN 60598-2-22; BS 5266-1; FSD PPA 104A(4 th Revision); FSD Code of Practice Clause 5.10 Exit Sign	



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice