

# "Halo-Lite" Economic Type Power LED Series

LED 雙眼龍 (經濟型) 系列

## Application

- Power LED Lamps
- High efficiency
- Durable
- Wall-mount / Recess Ceiling-mount
- GMS box with white powder coating
- Maintenance free

## Specification


Wall-mount / Recess Ceiling-mount, self-contained, non-maintained type, dual spot luminaire with automatic changeover device for minimum 3 hours emergency battery discharge.



"CRISTALITE" Cat. CE-DPC-2X3W

## Standards


- BS 5266 — Part I
- BS EN 60598-2-22 (850°C hot wire test)
- FSD PPA 104(A) 4<sup>th</sup> Revision

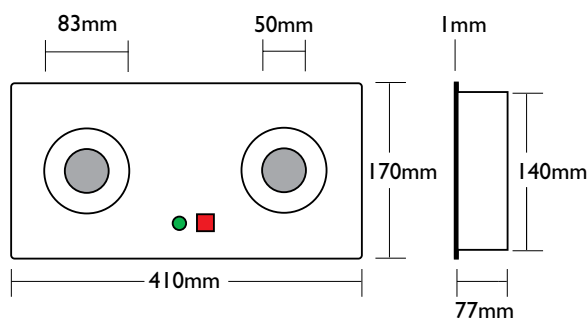

Recessed Box Size: 380 x 140 x 77mm



"CRISTALITE" Cat. CE-DPW-2X3W

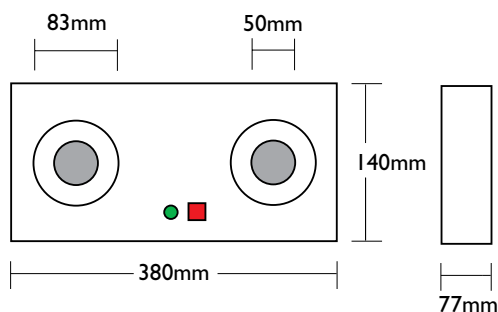

## Technical Data

Model	CE-DPC-2X3W	CE-DPW-2X3W
System Mode	Non-Maintained Type	
Mounting	Ceiling-mount	Wall-mount
Emergency Output	2 x 3W Power LED	
Discharge Duration	3 Hours	
Battery	Sealed Ni-cad High Temperature Battery 5x4.0Ah, 6V	
Recharge Period	12 Hours for 2 Hours discharge / 24 Hours for 3 Hours discharge	
Line Voltage	A/C 220V~230V 50Hz +6%-10%	
Compliance	BS EN 60598-2-22; BS 5266-1, FSD PPA 104A (4 <sup>th</sup> Revision)	



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM  
Content is subject to change without notice



# "Single-Spot" Economic Type Power LED Series

LED 獨眼龍 (經濟型) 系列

## Application

- Power LED Lamps
- High efficiency
- Durable
- Wall-mount / Recess Ceiling-mount
- GMS box with black and/or white powder coating
- Maintenance free

## Specification

Wall-mount / Recess Ceiling-mount, self-contained, non-maintained type, single spot luminaire with automatic changeover device for minimum 3 hours emergency battery discharge.




"CRYSTALITE" Cat. CE-SPC-1X3W




"CRYSTALITE" Cat. CE-SPW-1X3W

## Standards

- BS 5266 — Part I
- BS EN 60598-2-22 (850°C hot wire test)
- FSD PPA 104(A) 4<sup>th</sup> Revision

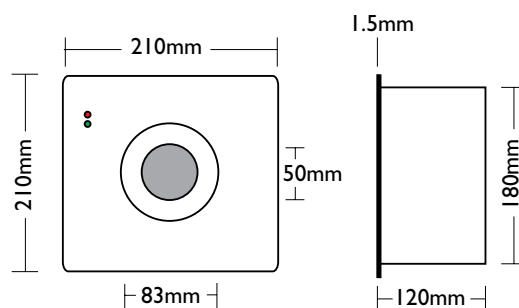

Recessed Box Size: 180 x 180 x 120mm

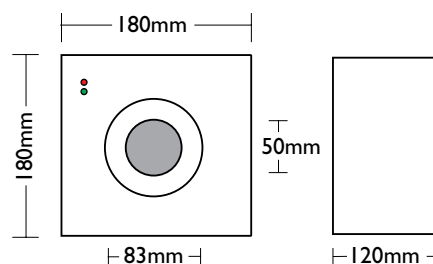

## Technical Data

Model	CE-SPC-1X3W	CE-SPW-1X3W
System Mode	Non-Maintained Type	
Mounting	Ceiling-mount	Wall-mount
Emergency Output	1 x 3W Power LED	
Discharge Duration	3 Hours	
Battery	Sealed Ni-cad High Temperature Battery 5x2.2Ah, 6V	
Recharge Period	12 Hours for 2 Hours discharge / 24 Hours for 3 Hours discharge	
Line Voltage	A/C 220V~230V 50Hz +6%-10%	
Compliance	BS EN 60598-2-22; BS 5266-1, FSD PPA 104A (4 <sup>th</sup> Revision)	



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM  
Content is subject to change without notice



# "Bi-Lite" Economic Type Power LED Series

LED 貓燈 (經濟型) 系列

## Application

- Power LED Lamps
- High efficiency
- Durable
- Wall-mount
- GMS box with white powder coating
- GMS lamp heads
- Clear glass lens diffuser
- Maintenance free

## Specification


Surface mounted, self-contained, non-maintained type, twin spot luminaire with automatic changeover device for 3 hours emergency battery discharge.



"CRYSTALITE" Cat. CE-LED-2X1W & CE-LED-2X3W

## Standards

- BS 5266 — Part I
- BS EN 60598-2-22 (850°C hot wire test)
- FSD PPA 104(A) 4<sup>th</sup> Revision

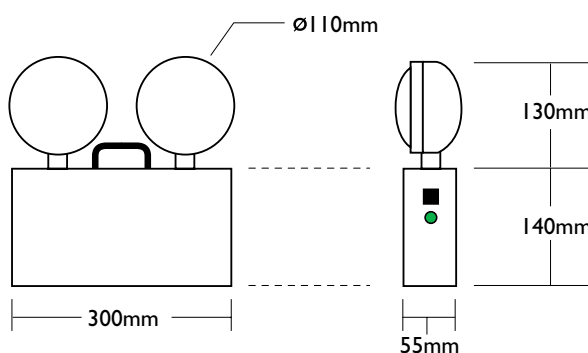

## Technical Data

Model	CE-LED-2X1W (LED 細貓)	CE-LED-2X3W
System Mode	Non-Maintained Type	
Mounting	Wall-mount	
Emergency Output	2 x 1W Power LED	2 x 3W Power LED
Discharge Duration	3 Hours	
Battery	Sealed Ni-cad High Temperature Battery	
	5x2.2Ah, 6V	5x4.0Ah, 6V
Recharge Period	12 Hours for 2 Hours discharge / 24 Hours for 3 Hours discharge	
Line Voltage	A/C 220V~230V 50Hz +6%-10%	
Compliance	BS EN 60598-2-22; BS 5266-1, FSD PPA 104A (4 <sup>th</sup> Revision)	



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM  
Content is subject to change without notice