

# "SINGLE-SPOT" SERIES


Recess Ceiling-Mount Type  
GREEN-CELL 獨眼龍系列

## Description

It is specially designed to fulfill the high demand of using low voltage tungsten halogen downlight. "Single Spot" is a state-of-art luminaire perfect ideal to provide general illumination in areas where emergency light fitting are to be concealed (or hidden). No screw will be applied because of spring lock opening. Also, a clear polycarbonate diffuser is provided as dust resistant.


## Standards

- BS 5266 – Part I
- BS EN 60598-2-22 (850°C hot wire test)
- FSD PPA 104(A) 4<sup>th</sup> Revision

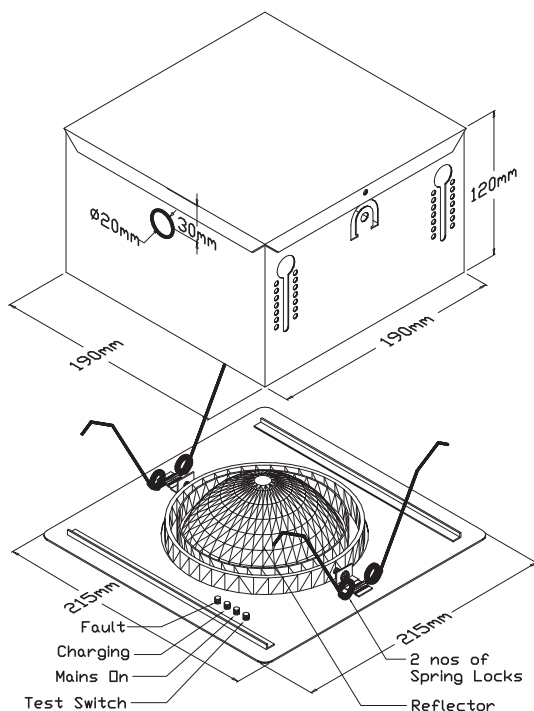

**"CRYSTALITE" Cat. CS-6-10-K2-GC**  
false ceiling-mount

## Connection Diagram

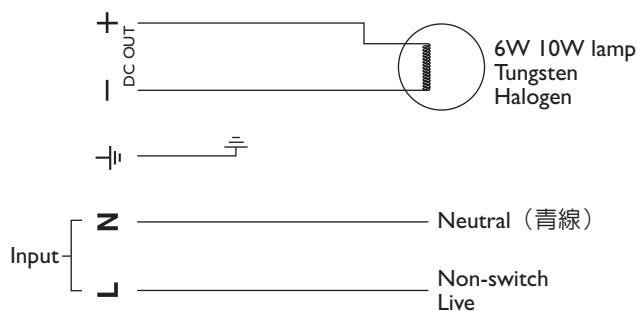

## Technical Data

Model	CS-6-10-K2-GC
Lamp Type	6V 10W Tungsten Halogen c/w AR111 Silver Reflector downlight
System Mode	Non-Maintained Type
Discharge Duration	2 Hours
Battery	Sealed Ni-mh High Temperature Rechargeable Battery 6V 4.0Ah
Operating Temperature	0°C - 50°C
Transfer time	< 0.3 second
Recharge Period	12 Hours
Line Voltage	A/C 220V~240V 50Hz +6%-10%
Low Discharge Protection	Electronic Protection
Compliance	BS EN 60598-2-22 ; BS 5266-1, FSD PPA 104A (4 <sup>th</sup> Revision)