

POWER LED 12V BATTERY TYPE TEST SERIES (CNAS APPROVAL)

Power LED 12V 電池系列

Remarks: This is specially designed for ASD's project and maintenance works.

Application

- Power LED Lamps with 50,000 working hours
- High efficiency
- Durable
- Wall-mount / Recess Ceiling-mount
- GMS box with white powder coating
- Maintenance free

Specification

Wall-mount / Recess Ceiling-mount, self-contained, nonmaintained type, LED luminaire with automatic changeover device for 2 or 3 hours emergency battery discharge.

Standards

- BS 5266 – Part I
- BS EN 60598-2-22 (850°C hot wire test)
- FSD PPA 104(A) 4th Revision

Panel Status

Test	●
Mains On	●
Charging	●
Fault	●


Technical Data

Model	CE-DPC-2X3W-12V-GC-2H	CE-DPC-2X3W-12V-GC-3H	CE-DPW-2X3W-12V-GC-2H	CE-DPW-2X3W-12V-GC-3H
System Mode	Non-Maintained Type			
Mounting	Ceiling-mount		Wall-mount	
Emergency Output	2 x 3W Power LED			
Discharge Duration	2 Hours	3 Hours	2 Hours	3 Hours
Battery	Sealed Ni-mh High Temperature Battery			
	12V 2.0Ah	12V 2.4Ah	12V 2.0Ah	12V 2.4Ah


Model	CE-SPC-1X3W-12V-GC-3H	CE-SPW-1X3W-12V-GC-3H	CE-LED-2X3W-12V-GC-2H	CE-LED-2X3W-12V-GC-3H
System Mode	Non-Maintained Type			
Mounting	Ceiling-mount	Wall-mount	Wall-mount	
Emergency Output	3W Power LED		2 x 3W Power LED	
Discharge Duration	3 Hours		2 Hours	3 Hours
Battery	Sealed Ni-mh High Temperature Battery			
	12V 1.3Ah		12V 2.0Ah	12V 2.4Ah
Recharge Period	12 Hours for 2 Hours discharge / 24 Hours for 3 Hours discharge			
Line Voltage	A/C 220V~240V 50Hz +6%-10%			
Compliance	BS EN 60598-2-22 ; BS 5266-1, FSD PPA 104A (4 th Revision)			




"CRYSTALITE" Cat. CE-DPC-2X3W-12V-GC-2H & CE-DPC-2X3W-12V-GC-3H

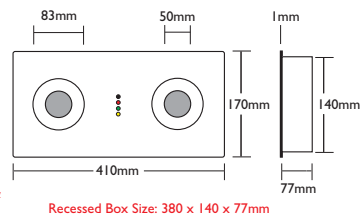


"CRYSTALITE" Cat. CE-DPW-2X3W-12V-GC-2H & CE-DPW-2X3W-12V-GC-3H




"CRYSTALITE" Cat. CE-SPC-1X3W-12V-GC-3H

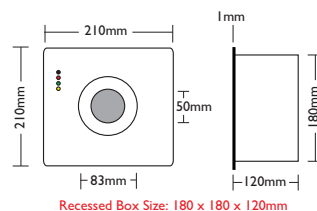

"CRYSTALITE" Cat. CE-SPW-1X3W-12V-GC-3H



"CRYSTALITE" Cat. CE-LED-2X3W-12V-GC-2H & CE-LED-2X3W-12V-GC-3H



SELF-CONTAINED EMERGENCY LIGHTING SYSTEM
Content is subject to change without notice